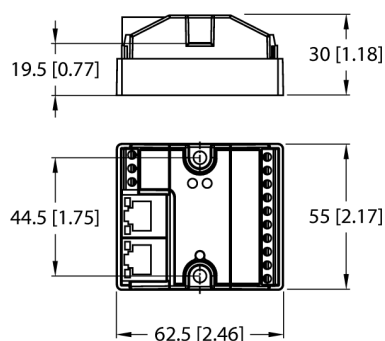


Compact IP20 multiprotocol Ethernet I/O module

Master to Master Data Exchange, NAT Router

FEN20-EN1



Type	FEN20-EN1
ID	6931305
Number of channels	8
Operating / load voltage	12...30 VDC
Operating current	100 mA
Electrical isolation	500 V between the I/O groups and to Ethernet
Supply voltage	24 VDC
Power dissipation, typical	≤ 2.4 W
Voltage supply connection	Screw terminals
Inputs	
Number of channels	8
Input voltage	24 VDC
Supply current	700 mA
Switching threshold	7V / 1.65 mA
Low-level signal voltage	< 7 VDC
High level signal voltage	7...30 VDC
Low level signal current	< 1.5 mA
High level signal current	> 2,5 mA
Input delay	2.5 ms
Max. input current	6 mA
System data	
Transmission rate	10/100 Mbps; Full/Half Duplex; Auto Negotiation; Auto Crossing
Addressing modes Ethernet:	via software
Connection technology Ethernet	2 × RJ45 female connector
Protocol detection	automatic
Web server	192.168.1.254 (default)
Service interface	Ethernet
Device Reset	via Push-button

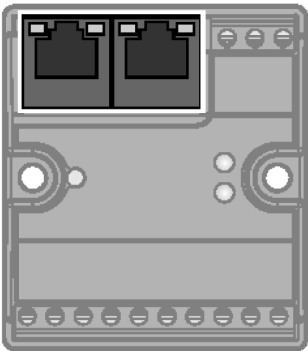
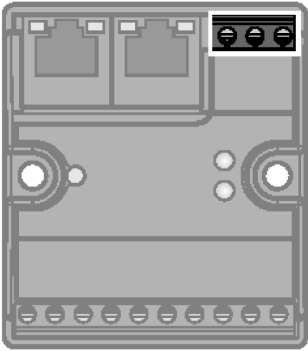
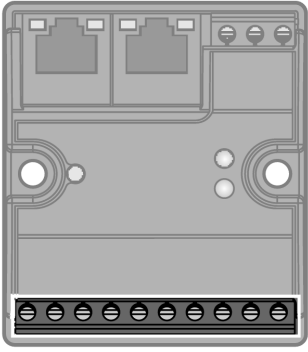


- Two separate, electrically isolated Ethernet interfaces
- Bi-directional data exchange between two networks
- Protocol conversion between EtherNet/IP, Modbus TCP and Profinet
- Profinet is supported on P2 Ethernet port
- 1:1 NAT router
- 10 Mbps/100 Mbps supported
- 2 RJ45 ports for the Ethernet connection
- 8 digital inputs
- 24 VDC, PNP
- Protection class IP20

Modbus TCP	
Addressing	Static IP, BOOTP, DHCP
Supported function codes	FC1, FC2, FC3, FC4, FC5, FC6, FC15, FC16, FC23
Number of TCP connections	6
Input Data Size	max. 1 register
Input register start address	0 (0x0000 hex)
Output Data Size	max. 1 register
Output register start address	2048 (0x0800 hex)

Ethernet/IP	
Addressing	acc. to EtherNet/IP specification
Quick Connect (QC)	< 150 ms
Device Level Ring (DLR)	supported
Class 1 connections (CIP)	6

PROFINET	
Addressing	DCP
Conformance class	B (RT)
MinCycleTime	1 ms
Fast Start-Up (FSU)	< 150 ms
Diagnostics	acc. to PROFINET alarm handling
Topology detection	supported
Automatic addressing	supported
Media Redundancy Protocol (MRP)	supported

Dimensions (W x L x H)	55 x 62.5 x 30 mm
Housing material	glass fiber reinforced polyamide (PA6-GF30)
Ambient temperature	-40...+70 °C
Storage temperature	-40...+85 °C
Protection class	IP20
MTTF	459 years acc. to SN 29500 (Ed. 99) 20 °C
Approvals	CE, cULus, Class I, Div. 2

	Ethernet Ports	RJ45 Ethernet  87654321 1 = TX + 2 = TX - 3 = RX + 4 = n.c. 5 = n.c. 6 = RX - 7 = n.c. 8 = n.c.
	Power Supply Recommended torque for screw terminals: 0.5 Nm (4.43 lb.in)	Power Supply  1 2 3 1 = $\oplus$ 2 = V1- 3 = V1+
	Digital Inputs Recommended torque for screw terminals: 0.5 Nm (4.43 lb.in)	Terminal Connection  1 2 3 4 5 6 7 8 9 10 1 = V1- 2 = I0 3 = I1 4 = I2 5 = I3 6 = I4 7 = I5 8 = I6 9 = I7 10 = Vout1+ 3-wire 

LED Status Modul

Beleuchtung:	Farbe	Status	Beschreibung
ETH1 / ETH2	grün	AN	Ethernet Link (100 Mbit/s)
		blinkt	Ethernet Kommunikation (100 Mbit/s)
	gelb	AN	Ethernet Link (10 Mbit/s)
		blinkt	Ethernet Kommunikation (10 Mbit/s)
		AUS	Kein Ethernet Link
Bus	grün	AN	Aktive Verbindung zu einem Master
		Blinkt	Betriebsbereit
	rot	AN	IP-Adressen Konflikt oder Statuswort aktiv
		Blinkt	Blink/Wink Kommando aktiv
		AUS	Keine Spannungsversorgung
ERR	grün	AN	Diagnosefunktion deaktiviert
	rot	AN	Kurzschluss

Prozessdaten Mapping

Modbus TCP Register Mapping

	Reg	Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
Inputs (RO)	0x0000	-	-	-	-	-	-	-	-	DI7	DI6	DI5	DI4	DI3	DI2	DI1	DI0
Status (RO)	0x0001	-	FCE	SPE2	SPE1	CFG	COM	V1 low	-	-	-	-	-	-	-	-	Diag
Diag (RO)	0x0002	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Spanner Input	0x3000-0x30EF	240 Words Data Exchange															
Spanner Output	0x3400x34EF00	240 Words Data Exchange															

EtherNet/IP™ Data Mapping

INPUT	Word	Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
	0	-	FCE	SPE2	SPE1	CFG	-	V1 low	-	-	-	-	-	-	-	-	Diag
	1	-	-	-	-	-	-	-	-	DI7	DI6	DI5	DI4	DI3	DI2	DI1	DI0
	2	Reserved															
	3	Reserved															
	4 - 243	Eingangsdaten															
OUTPUT	Word	Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
	0 - 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	4 - 243	Ausgangsdaten															

PROFINET Process Data

	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
Inputs	0	DI7	DI6	DI5	DI4	DI3	DI2	DI1	DI0
	1	-	-	-	-	-	-	-	-
Outputs	0	-	-	-	-	-	-	-	-
	1	-	-	-	-	-	-	-	-

Key:

DIx	Digital input x	COM	Communication error on internal module bus
SPEx	Spanner established connection port x	CFG	I/O configuration error
V1 low	Undervoltage V1	FCE	I/O-ASSISTANT Force Mode active
Diag Warn	Diagnostic at least on 1 channel	Diag	I/O diagnostic detected

Accessories

Type code	Ident no.		Dimension drawing
FDN20-BKT-DIN	Z0076	Mounting adapter for mounting of 8-channel Fxx20 modules on DIN rail (TS 35)	