


Frequency Transducer/Pulse Counter 1-channel IMX12-FI01-1SF-1I1R-C0/24VDC/CC

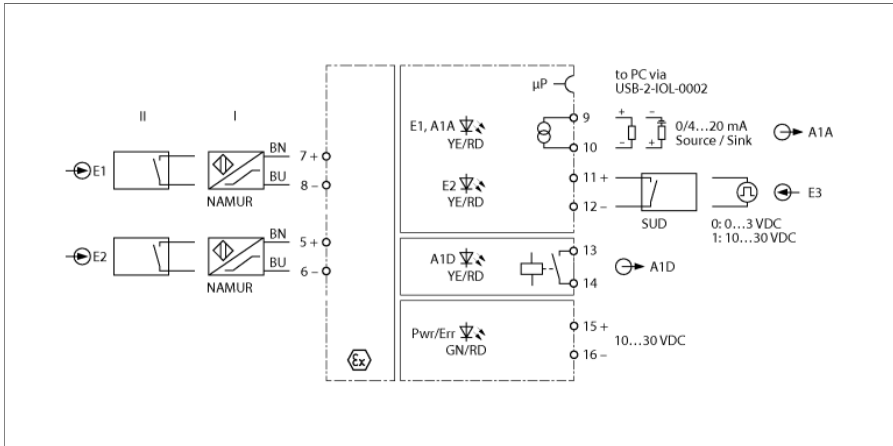

The frequency transducer/pulse counter IMX12-FI01-1SF-1I1R-C0/24VDC/CC is equipped with intrinsically safe input circuits and transmits frequency signals up to 20,000 Hz from the Ex area to the non-Ex area such that the signals are galvanically isolated. In addition, limits, slip or clockwise/counter-clockwise rotation can be monitored. The devices are suitable for operation in zone 2.


The 1-channel device is equipped with two intrinsically safe inputs for the connection of sensors acc. to EN 60947-5-6 (NAMUR). On the output side, there is a 0/4...20 mA current output and a normally open relay.

The device is parameterized via FDT and IODD with a PC. The current output can be set to 0/4...20 mA (source or sink optional). In accordance with the parameterization (I1, I2, I1 - I2 or I2 - I1), the input signals are output as a 0/4...20 mA normalized current signal. The normally open relay facilitates the monitoring of set limits for exceedance/shortfall and monitoring using a window function. The start-up bypass (SUD) is activated via input I1, I2 or I3.

The devices have a green power LED (Pwr) and a red LED to indicate internal faults. For the input circuit, a yellow and red status LED is available. A fault in the input circuit leads to a flashing red LED according to NE44, an internal error to a steady red LED. The fault current can be adjusted to < 3.5 mA or > 21.5 mA. A yellow LED indicates the switching state of the limit value relay. A yellow LED indicates that the start-up bypass is turned on.

The device can be used in safety circuits up to SIL2 (high and low demand according to IEC 61508) and meets the requirements of NE21. It is equipped with removable spring type terminals.

The device is equipped with removable spring-type terminals.

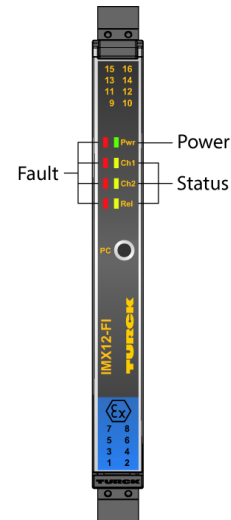

- Input circuits monitored for wire-break and short-circuit
- Parameterized via PC
- Complete galvanic isolation
- Input reverse-polarity protected
- Removable spring type terminals
- ATEX, IECEx, cFM, cUL, NEPSI, INMETRO, Kosha, TIIS,
- Use in Zone 2
- SIL 2

Dimensions




Type	IMX12-FI01-1SF-1I1R-C0/24VDC/CC
ID	7580207
Nominal voltage	24 VDC
Operating voltage U_s	10...30 VDC
Power consumption	≤ 3 W
Power dissipation, typical	≤ 1.7 W
Monitoring range/Setting range	0.0006...1,200,000 rpm
NAMUR input	
NAMUR	EN 60947-5-6
No-load voltage	8.2 VDC
Short-circuit current	8.2 mA
Input resistance	1 k Ω
Cable resistance	≤ 50 Ω
Switch-on threshold	1.75 mA
Switch-off threshold	1.55 mA
Wire breakage threshold	≤ 0.06 mA
Short-circuit threshold	≥ 6.4 mA
Output circuits	
Output current	Source/sink (10...30 V) 0/4...20 mA
Load resistance current output	≤ 0.8 k Ω
Output circuits (digital)	1 x relay (change-over)
Output switching voltage relay	≤ 30 VDC / ≤ 250 VAC
Switching current per output	≤ 2 A
Switching capacity per output	≤ 500 VA/60 W
Switching frequency	≤ 15 Hz
Contact quality	AgNi
Response characteristic	
Reference temperature	23 °C
Measuring accuracy current output (including linearity, hysteresis and repeatability)	± 10 μ A
Temperature drift	≤ 0.0025 % of full scale/K
Galvanic isolation	
Test voltage	2.5 kV RMS
E1,E2-E3	375 V peak value acc. to EN 60079-11
E1,E2 supply voltage	375 V peak value acc. to EN 60079-11
A1A supply voltage	300 V RMS acc. to EN 50178 and EN 61010-1
E3 supply voltage	375 V peak value acc. to EN 60079-11
A1A-A1D	300 V RMS acc. to EN 50178 and EN 61010-1
A1A-E3	300 V RMS acc. to EN 50178 and EN 61010-1
Important note	For Ex-applications the values specified in the corresponding Ex certificates (ATEX, IECEx, UL, etc.) apply.
Ex approval acc. to conformity certificate	TÜV 16 ATEX 192124 X
Application area	II (1) G, II (1) D
Ignition protection category	G [Ex ia Ga] IIC; D [Ex ia Da] IIIC
Application area	II 3 (1) G
Ignition protection type	Ex ec nC [ia Ga] IIC T4 Gc
Important note	If the device is used in applications to achieve functional safety according to IEC 61508, the safety manual must be used. Information in the data sheet are not valid for functional safety.
Use in SIL safety circuits	SIL 2 acc. to IEC 61508

Displays/Operating elements	
Operational readiness	Green
Switching state	Yellow
Error indication	red

Mechanical data	
Protection class	IP20
Flammability class acc. to UL 94	V-0
Ambient temperature	-25...+70 °C
Storage temperature	-40...+80 °C
Dimensions	120 x 12.5 x 128 mm
Weight	172 g
Mounting instructions	DIN rail (NS35)
Housing material	Plastic, Polycarbonate/ABS
Electrical connection	Removable spring-type terminals, 2-pin
Terminal cross-section	0.2...2.5 mm² (AWG: 24...14)

Environmental conditions	Operating height	Up to 2000 m above sea level
	Pollution degree	II
	Surge/Overvoltage category	II (EN 61010-1)
	Standards used	
	Voltage resistance and insulation	
		EN 50178
		EN 61010-1
		EN 50155
		GL VI-7-2
	Shock	
		EN 61373 class B
		EN 50155
		GL VI-7-2
		EN 60068-2-6
		EN 60068-2-27
	Temperature	
		EN 60068-2-1 Ad
		EN 50155
		GL VI-7-2
		EN 60068-2-2 Bd
		EN 60068-2-1
	Air humidity	
		EN 60068-2-38
	EMC	
		EN 50155
		GL VI-7-2
		NE21
		EN 61326-1
		EN 61326-3-1
		EN 61000-4-2
		EN 61000-4-3
		EN 61000-4-4
		EN 61000-4-5
		EN 61000-4-6
		EN 61000-4-11
		EN 61000-4-29
		EN 55011
		EN 55016
		EN 50121-3-2
		EN 61000-6-2

Accessories

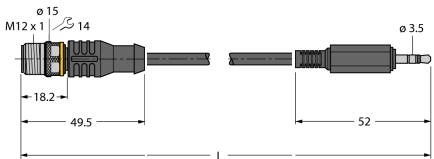Type code	Ident no.		Dimension drawing
USB-2-IOL-0002	6825482	IO-Link Master with integrated USB port	
IOL-COM/3M	7525110	IO-Link communication line for connecting IO-Link devices to an IO-link master via a 3.5-mm jack plug	
IMX12-SC-2X-4BK	7580940	Screw terminals for IM(X)12 modules; included in delivery: 4 pcs. of 2-pin black terminals	
IMX12-SC-2X-4BU	7580941	Screw terminals for IM(X) 12 modules; included in delivery: 4 pcs. of 2-pin blue terminals	
IMX12-CC-2X-4BK	7580942	Spring terminals for IM(X)12 modules; included in delivery: 4 pcs. black terminals, 2-pin	
IMX12-CC-2X-4BU	7580943	Spring terminals for IM(X)12 modules; included in delivery: 4 pcs. blue terminals, 2-pin	